

TECHNICAL SPECIFICATION


Floodlight - ATLAS 105



Technical data

- Rated voltage: 230V / 50Hz
- Lamp operation mode: Control gear
- Control gear: Mounted in the body
- Light source type (not included in the commercial kit): Metal-halide lamps (MHL)
- Lamp power: 250W, 400W
- Housing: Aluminium
- Housing colour: Black
- Reflector: Aluminium, symmetric
- Diffuser: Tempered glass
- Installation: Surface mounting, suitable for illumination of outdoor and indoor areas
- Lampholder type: E40
- Protection against dust and moisture: IP65
- Protection class: I
- Surface requirements: Class F
- Ambient temperature: -20°C ÷ +65°C

Variants and dimensions

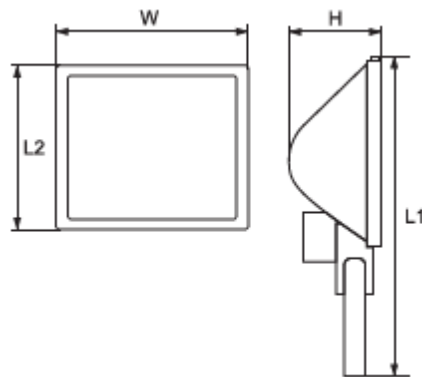


Watt	Lamp	Current (A)	Color	Size (mm)				Control gear	Catalogue number	Packing (pcs)
				L1	L2	W	H			
250W	MHL	3.00	black	505	290	410	142	magnetic	98AT105109	1
400W	MHL	3.50	black	505	290	410	142	magnetic	98AT105110	1
-	-	-	black	505	290	410	142	empty fixture	98ATLAS105	1


Luminous distribution curves



ATLAS 105 / 400W

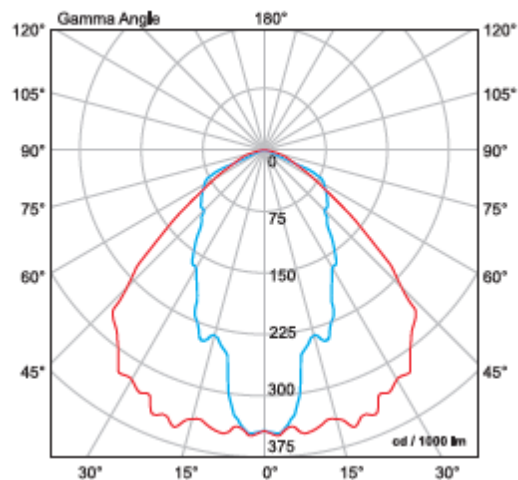

Energy efficiency

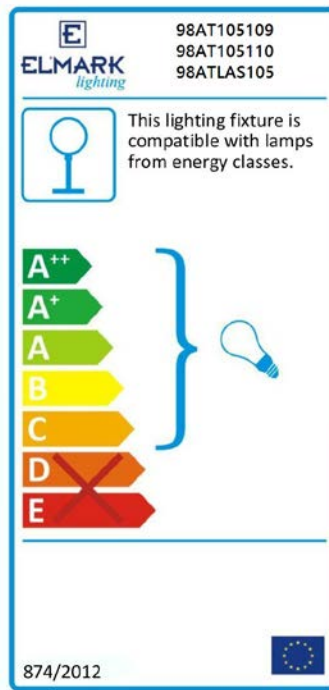

Barcodes

Barcode	Catalogue number
3800131164186	98AT105109
3800131164117	98AT105110
3800131164087	98ATLAS105

Standards

EN 55015

EN 61000-3-2; EN 61000-3-3

EN 61547

EN 61000-4-2; EN 61000-4-4; EN 61000-4-5; EN 61000-4-8; EN 61000-4-11;

EN 60598-1; EN 60598-2-5

