

## TECHNICAL SPECIFICATION

### Downlight fixtures for CFL - GL213



#### Technical data

- Nominal voltage: 230V / 50Hz
- Lamp power: 2X10W; 2X13W; 2X18W; 2X26W
- Lampholder designation: G24q
- Type of light source (not included commercial kit): 2pcs Compact fluorescent lamps PLC-2P (TC-D) or PLC-4P (TC-DEL)
- Operating mode:
  - Electronic control gear for PLC-4P type lamp (not included commercial kit)
  - Magnetic control gear for PLC-2P type lamp (not included commercial kit)
- Body material: Sheet steel with aluminium ring
- Diffuser: Glass with matt dots
- Reflector: Aluminium mirror
- Type of Installation: Surface mounting for indoor use
- Body color: white, satin nickel
- Dust and humidity protection level: IP20
- Protection against electric shock: I
- Protection against ignition and fire: Class F


## Areas of application

- Modern Residential Buildings
- Commercial buildings
- Offices
- Hotels
- Recreation facilities

## Product benefits


- Lightweight body
- Simple appearance
- Easy installation

## Variants and dimensions

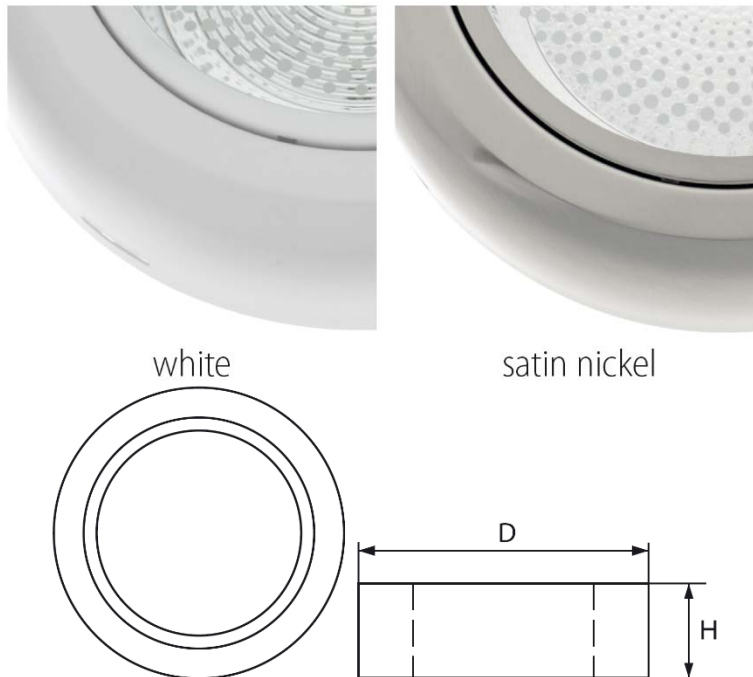

Model	Size (mm)		Colour body	Catalogue number	Packing (pcs)
	Diameter	Height			
GL 213	266	65	white	9299213P/W	10
GL 213	266	65	satin nickel	9299213P/SN	10

## Energy efficiency

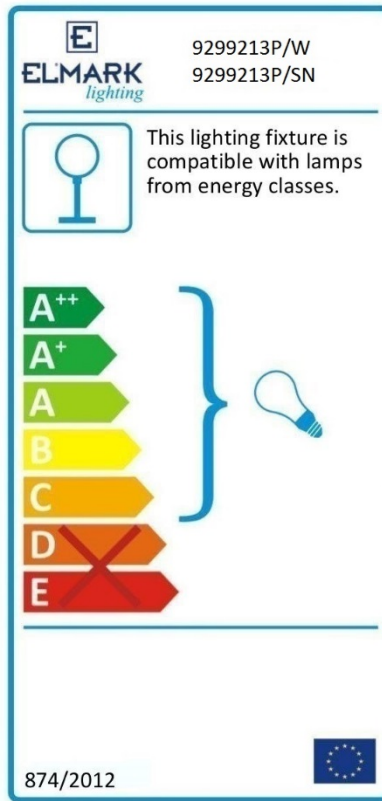

## Barcodes

Barcode	Catalogue number
3800131169860	9299213P/W
3800131169877	9299213P/SN

## Standards

EN 60598-1

EN 60598-2-1

