


TECHNICAL SPECIFICATION

Magnetic ballast for compact fluorescent lamp (TC-D / PLC4P)

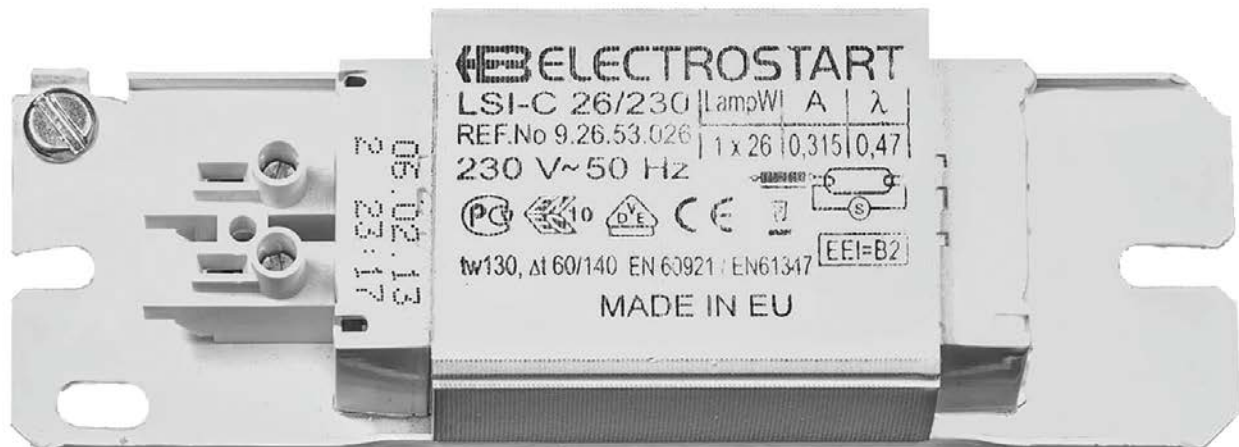


Technical data

- Nominal voltage: 230V / 50Hz
- Energy efficiency index: EEI=B2
- Lamp: lamp types it is designed for is indicated on the housing of the magnetic ballast
- Power factor λ : $\approx 0,47$
- Starting current: indicated on the housing
- Section of the input cable: $0,5\text{mm}^2 \div 1,5\text{mm}^2$
- Section of the output cable: $0,5\text{mm}^2 \div 1,5\text{mm}^2$

Note:

- Accurately controlled impedance and guaranteed constant parameters
- Vacuum impregnation
- Special enameled wire with high heat-resistance, tw 130

Variants and dimensions

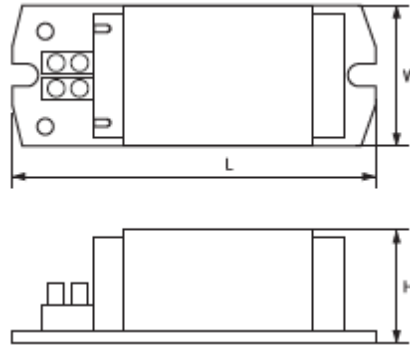

Model	Watt	Current (A)	cosφ	Size (mm)			Catalogue number	Packing (pcs)
				Length	Width	Height		
BALLAST	18W	0.220	0.48	105	41	26	990153008	40
BALLAST	26W	0.315	0.47	129	41	26	990153026	40

Barcodes

Barcode	Catalogue number
3800131189080	990153008
3800131189097	990153026

Standards

EN 60921

EN 61347

VDE 0712

