

## TECHNICAL SPECIFICATION

### Wall recessed fixtures

**GRF9620 LED**



**GRF9621 LED**



### Technical data

- Rated voltage: 230V / 50-60Hz
- Power of the light source:
  - GRF9620 LED – 6W
  - GRF9621 LED – 3W
- Light source: Osram LED
- Colour temperature: 4000-4300K
- Protection against dust and moisture : IP54
- Colour rendering index: Ra≥80
- LED driver: mounted in the body
- Average Lifetime: 30 000h
- Operating temperature: -20° ÷ + 65°C
- Case: aluminum
- Body colour: dark grey
- Installation: recessed outdoor wall mounting
- Surface requirements: Class F
- Protection against electric shock: I


## Areas of application

- Suitable for outdoor use
- Additional, aesthetic, directional, architectural lighting for buildings' facades, fences' columns and other outdoor sites

## Product benefits


- Highly efficient replacement of conventional lighting fixtures
- Low power consumption
- Repeated switch on/off does not affect the lifespan of the fixture
- Instant light with maximum luminous flux
- Environmentally friendly - no mercury and lead
- No ultraviolet and infrared rays
- Resistant to shock and vibration stable body
- Low heat emission
- Compact size

## Variants and dimensions

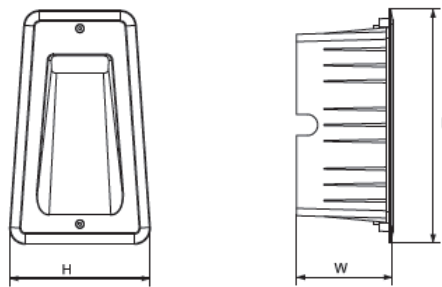

Model	Watt	LED chip lumens (lm)	Whole fixture lumens (lm)	Colour temp. (K)	Colour body	Size			Catalogue number	Packing (pcs)
						L	W	H		
GRF9620 LED	6W	520	480	4000-4300	dark grey	220	90	133	9620LEDW	12
GRF9621 LED	3W	360	260	4000-4300	dark grey	148	58	89	9621LEDW	12

## Energy efficiency

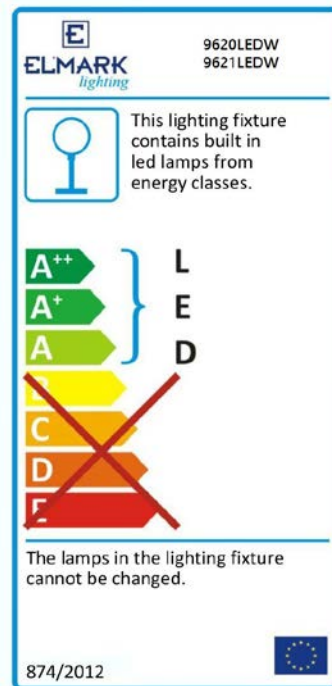

## Barcodes

Barcode	Catalogue number
3800131186508	9620LEDW
3800131186515	9621LEDW

## Standards

EN 55015

EN 61000-3-2; EN 61000-3-3

EN 61547

EN 60598-1; EN 60598-2-2

