


TECHNICAL SPECIFICATION

LED Cabinet Light – SAMI Luminaire SMD

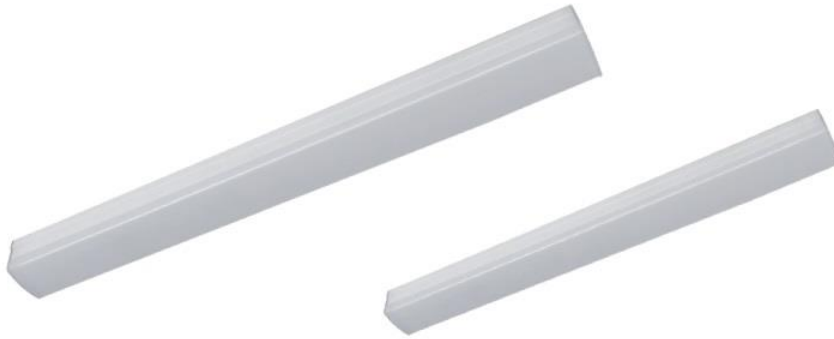

Technical data

- Power: 20W/ 40W
- Color temperature: 4000K
- Rated voltage: 230V/ 50-60Hz
- Type of LED: SMD2835
- Light source: Epistar
- Luminous flux:
 - 20W - 1600lm
 - 40W - 3200lm
- Protection against dust and moisture: IP20
- Housing: polycarbonate
- Reflector: plastic mat cover
- Long life : 30000h
- Colour rendering index: Ra≥80


Areas of application

- Commercial buildings
- Administrative buildings
- Residential buildings
- Banks
- Hospitals
- Schools

Product benefits


- Safety, low voltage operation
- Replacement of conventional fluorescent tubes with highly efficient LED Strip
- Installation: surface ceiling mounting
- Low power consumption
- Repeated switch-on/off does not affect the lifespan of the luminaire
- Instant light with maximum luminous flux
- No ultraviolet and infrared rays
- Stable and uniform light distribution

Variants and dimensions

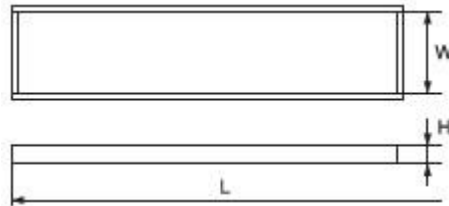

Watt	Lumen (lm)	Colour temp.	Colour body	Size			Catalogue number	Packing (pcs)
				Length	Width	Height		
20W	1600	4000	white	600	60	40	9SAMI20LED	1
40W	3200	4000	white	1200	60	40	9SAMI40LED	1

Energy efficiency

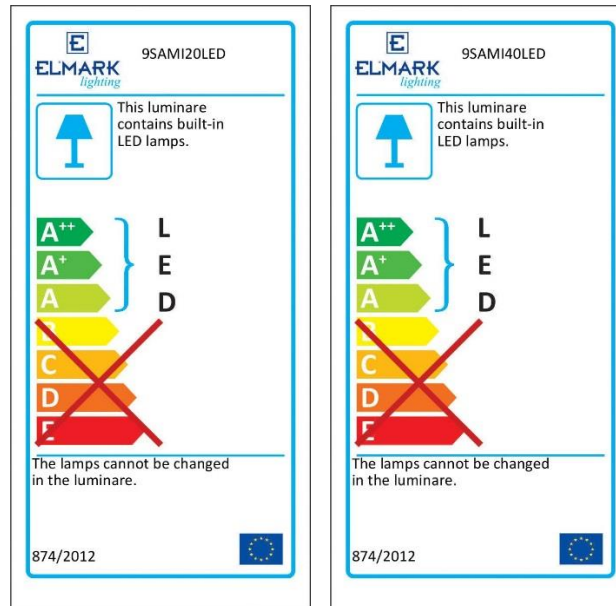

Barcodes

Barcode	Catalogue number
3800131192301	9SAMI20LED
3800131192318	9SAMI40LED

Standards

EN 55015

EN 61000-3-2

EN 61000-3-3

EN 61547

EN 60598-1

