



**LABORATORY FOR TESTING OF MACHINERY,
EQUIPMENT AND DEVICES**

CENTER FOR TESTING AND EUROPEAN CERTIFICATION LTD

2, Industrialna Str., Stara Zagora, Bulgaria,

Tel.: +359 42 620 368 Fax: +359 42 602 377 ctec@ctec-sz.com

TEST REPORT

№ 2emc-e-15-037 / 06.04.2015

OBJECT TO BE TESTED: Electrical and electronic equipment - Luminaire

Luminaire - LED lighting fixtures, "PANEL" Model: LED PANEL ROUND, cat.№ 99LED621
Representative sample from fixtures group LED PANEL ROUND with cat. №: 99LED609;
99LED610; 99LED611; 99LED612; 99LED613; 99LED614; 99LED615; 99LED616; 99LED617;
99LED618; 99LED619; 99LED620; 99LED622; 99LED623; 99LED624; 99LED625; 99LED626;
99LED627; 99LED628; 99LED629; 99LED630; 99LED631;
*(name of object to be tested, type, model, quantity,
type – portable, fixed, for walling in and other)*

APPLICANT FOR TEST: "ELMARK INDUSTRIES" SC. 2 Dobrudja Blvd. Dobrich, Bulgaria ,

Tel.: 058 500 055, e-mail: denkov@elmark.bg

Application № 037 / 11.02.2015

(name of the firm – applicant, address, telephone, number and date of the test application)

METHOD OF TEST : EN 55015:2006+A1:2007+A2:2009 Limits and methods of measurement of radio disturbance characteristics of electrical lighting and similar equipment.

(number and name of the standards)

DATE OF ACCEPTANCE IN THE TEST LABORATORY: 11.03.2015

YEAR OF PRODUCTION : 2015

(identification number)

MANUFACTURER: "ELMARK INDUSTRIES" SC. 2 Dobrudja Blvd. Dobrich, Bulgaria ,

Tel.: 058 500 055, e-mail: denkov@elmark.bg

(firm, trade mark, address)

DECLARED DATA: Declared voltage 230 – 240 V
Declared frequency 50-60 Hz
Declared power 30 W
Class II

ELECTRONIC CONTROL GEAR: LCM-40 ELMARK

DATE OF TEST PERFORMANCE: 19.03.2015

LABORATORY CHIEF:

/ T. Hristov /





I. Emission of Radio disturbance characteristics of electrical lighting and similar equipment

1. Radiated electromagnetic disturbances – 9kHz ÷ 30MHz

EN 55015, cl. 4.4 – Radiated electromagnetic disturbances, limits – Table 3

EN 55015, cl. 5.2.4 – Other luminaires

EN 55015, cl. 6 – Operating conditions for lighting equipment

EN 55015, cl. 6.4 – Ambient temperature: 24 °C ; Relative Humidity: 48 %.

EN 55015, cl.9.1 – Measuring arrangement and procedure

EN 55015, cl.9.2 – Indoor and outdoor luminaires

The test is performed at supply voltage: 230 V

RESULTS OF MEASUREMENT :

Frequency	Radiated electromagnetic disturbances - measured along the axis - X		
	Quasi peak - QP		
	Measuring	Margin	Limit
MHz	dB(µA)	dB(µA)	dB(µA)
0,215	26,07	27,60	53,67
0,220	25,88	27,51	53,39
0,320	-4,20	53,09	48,89
0,425	4,34	41,14	45,48
0,440	7,24	37,82	45,06
0,760	13,41	25,09	38,50
1,450	19,14	11,59	30,73
1,940	16,64	10,59	27,23
2,035	10,76	15,90	26,66
2,895	4,80	17,62	22,42
3,015	-0,99	22,99	22,00
3,565	-18,03	40,03	22,00
3,995	-18,73	40,73	22,00
7,345	-7,66	29,66	22,00
21,310	-19,60	41,60	22,00
29,475	-15,51	37,51	22,00

Drawing of Radiated electromagnetic disturbances - measured along the axis - X



The results showed in present test report concern tested sample only
The test report could be reproduced as a whole only and after written permission of the laboratory






Frequency

Radiated electromagnetic disturbances - measured along the axis - Y

Quasi peak - QP


	Measuring	Margin	Measuring
MHz	dB(μA)	dB(μA)	dB(μA)
0,215	30,24	23,43	53,67
0,220	30,09	23,30	53,39
0,350	-7,12	54,93	47,81
0,395	8,97	37,39	46,36
0,430	6,78	38,56	45,34
0,760	10,32	28,18	38,50
1,445	20,01	10,76	30,77
1,940	16,66	10,57	27,23
2,040	8,09	18,54	26,63
2,875	2,70	19,81	22,51
3,000	-5,83	27,83	22,00
3,565	-21,39	43,39	22,00
3,835	-22,79	44,79	22,00
4,240	-22,44	44,44	22,00
7,345	-13,84	35,84	22,00
29,475	-19,59	41,59	22,00

Drawing of Radiated electromagnetic disturbances - measured along the axis - Y

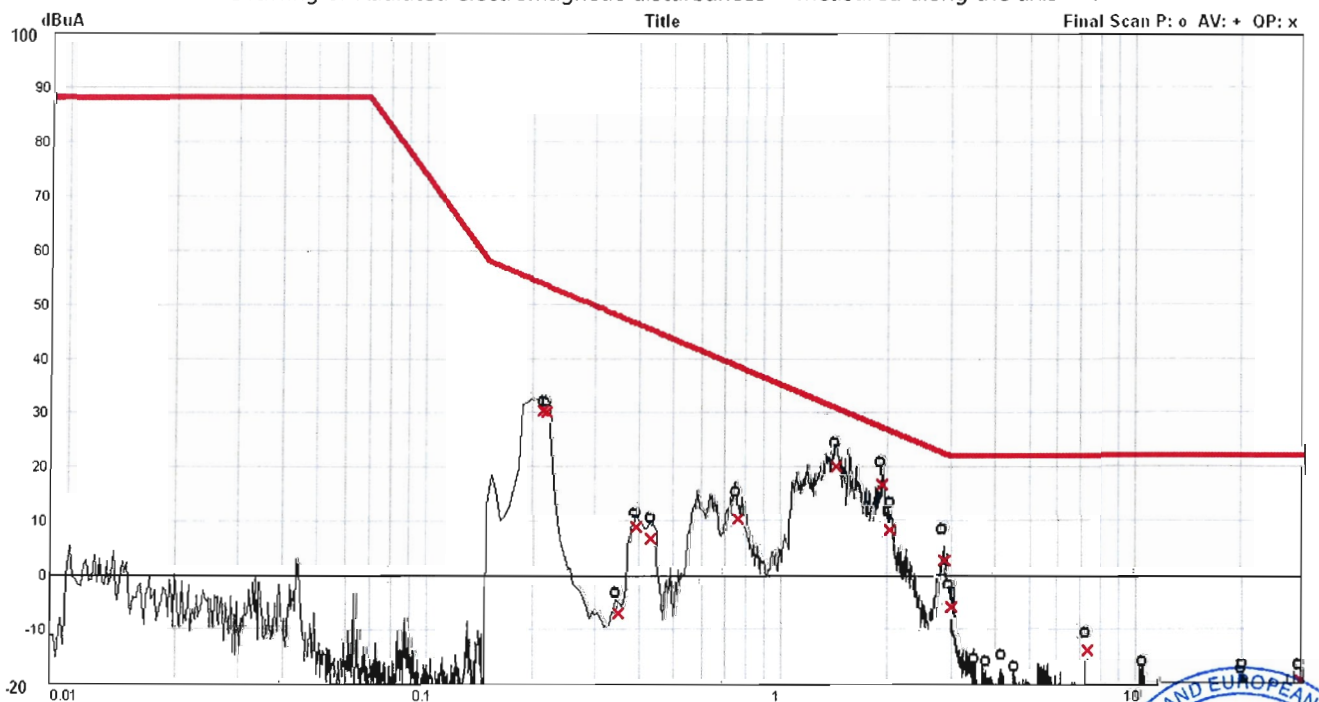

0.009 MHz Step: 0.2kHz IFBW: 0.2kHz MTimePre: 10ms DetectPre: AVCisp SubRange: 5 MTimeFin: 1s DetectFin: QP
File: 37-22.RSC MessStart: Thursday 19.Mar.2015 16:10 CorFactor: LLA-AF.COR Limit Line: LLA1.LIM

*The results showed in present test report concern tested sample only
The test report could be reproduced as a whole only and after written permission of the laboratory*






Radiated electromagnetic disturbances - measured along the axis - Z

Frequency

Quasi peak - QP

	Measuring	Margin	Measuring
MHz	dB(μA)	dB(μA)	dB(μA)
0,215	28,10	25,57	53,67
0,225	27,37	25,75	53,12
0,350	-6,42	54,23	47,81
0,425	-11,21	56,69	45,48
0,435	2,81	42,39	45,20
0,585	13,66	27,98	41,64
1,425	4,99	25,95	30,94
1,505	-0,48	30,76	30,28
2,070	-7,30	33,75	26,45
2,805	-13,11	35,91	22,80
3,025	-24,52	46,52	22,00
3,880	-28,90	50,90	22,00
4,395	-28,05	50,05	22,00
4,955	-25,81	47,81	22,00
6,710	-18,47	40,47	22,00
29,475	-17,10	39,10	22,00

Drawing of Radiated electromagnetic disturbances - measured along the axis - Z

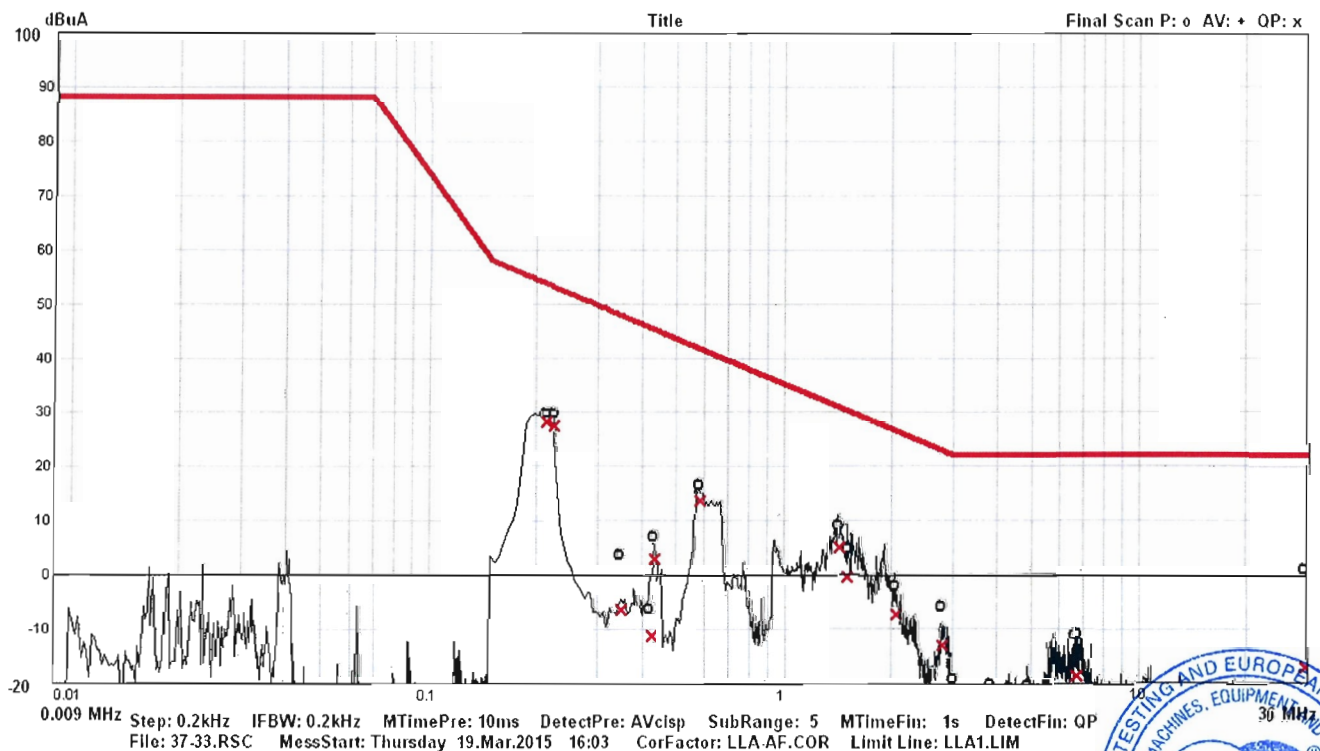

*The results showed in present test report concern tested sample only
The test report could be reproduced as a whole only and after written permission of the laboratory*





Used technical equipments:

	Appliance	Type	Manufacturer	Identity №	Last calibration date
1.	EMI – receiver 9 kHz ÷ 1000 MHz	SCR 3501	Schaffner Electrotest GmbH, Germany	522	26.06.2014
2.	Large loop antenna 2m	RF300	Laplace Instruments LTD U.K.	9123	12.03.2013
3.	Digital multimeter	UNIGOR 390	LEM Austria	PI 3288	19.03.2014
4.	Thermometer-higrometer	177-H1	TESTO Germany	01320300/902	19.04.2012

TEST PERFORMER:

1.

/ T. Hristov /



2.

/ D. Chavalinov /

CHIEF LABORATORY :

/ T. Hristov /

*The results showed in present test report concern tested sample only
The test report could be reproduced as a whole only and after written permission of the laboratory*