

TECHNICAL SPECIFICATION

LED Cabinet Light – CAB-12



Technical data

- Power: 7W
- Color temperature: white / warm white
- Rated voltage: 12VDC
- Power Supply : Low Voltage , DC device
- Built - in motion sensor
- Type of LED: SMD5050
- Light source: Epistar Taiwan
- Luminous flux: 480lm
- Protection against dust and moisture: IP20
- Housing: aluminum body 450x50x9mm
- Diffuser: diffused cover
- Long life : 30000h
- Beam angle: 120°
- Colour rendering index: Ra≥80


Areas of application

- Kitchen facilities
- Service areas
- Residential buildings
- Retail Showcases and counters

Product benefits


- Safety, low voltage operation
- Uniform and gentle illumination
- Low power consumption
- Repeated switch on/off does not affect life span
- Instant light with maximum luminous flux
- Environmentally friendly - no mercury and lead
- No ultraviolet and infrared rays

Variants and dimensions

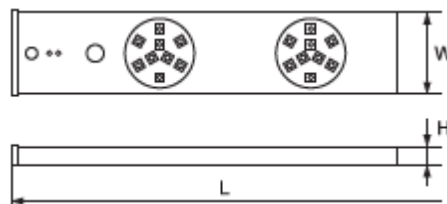

Watt	Lumen (lm)	Colour temp.	Colour body	Size			Catalogue number	Packing (pcs)
				Length	Width	Height		
7W	480	white	grey	450	50	9	912LED06	10
7W	480	warm white	grey	450	50	9	912LED16	10

Energy efficiency

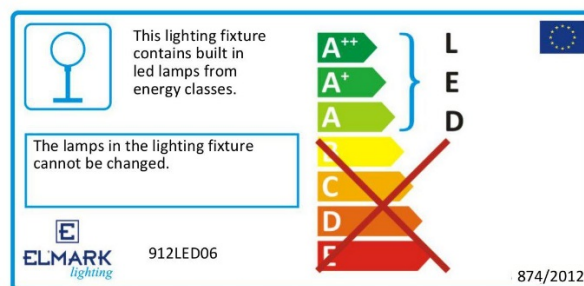

Barcodes

Barcode	Catalogue number
3800131179890	912LED16
3800131179531	912LED06

Standards

EN 60598-1

EN 60598-2-1

EN 55015

EN 61547

EN 61000-3-2

