

TECHNICAL SPECIFICATION

LENA – I with LED tubes



Technical data

- Rated voltage : 230V/50Hz
- Type of light source : LED tube
 - T8 10W 850Lm
 - T8 18W 1700Lm
- Protection against dust and moisture : IP21
- Housing: white powder painted sheet steel
- Reflector : aluminum single parabolic mirror
- Long life : 30000 hours
- Base: G13
- Colour rendering index: Ra≥80


Areas of application

- Commercial buildings
- Administrative buildings
- Residential buildings
- Banks
- Hospitals
- Schools

Product benefits

- Replacement of conventional fluorescent tubes with highly efficient LED tubes
- Installation options: built-in suspended ceiling / surface ceiling mounting
- Low power consumption
- Repeated switch-on/off does not affect the lifespan of the luminaire
- Instant light with maximum luminous flux
- No ultraviolet and infrared rays
- Stable and functional light distribution

Variants and dimensions

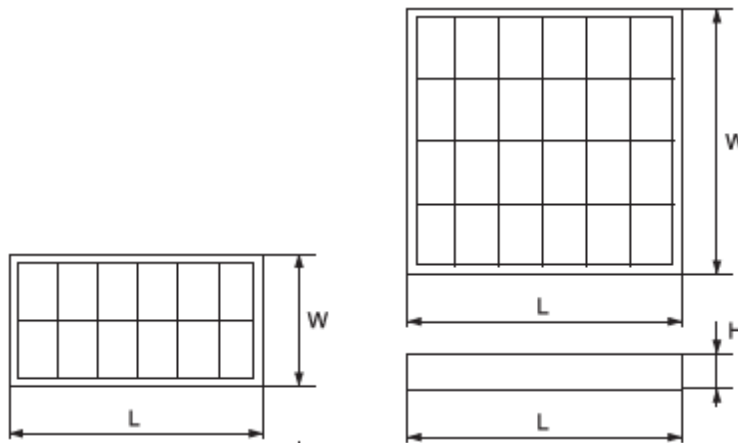


- LENA – I BM (recessed mounted luminaire) with LED tubes

Watt	Colour temp. (K)	Colour body	Size			Catalogue number	Packing (pcs)
			Length	Width	Height		
2X10W	6400	white	595	295	70	9LBM260LEDKCW	1
2X10W	4000	white	595	295	70	9LBM260LEDK	1
4X10W	6400	white	595	595	70	9LBM460LEDKCW	1
4X10W	4000	white	595	595	70	9LBM460LEDK	1
2X18W	6400	white	1195	295	70	9LBM2120LEDKCW	1
2X18W	4000	white	1195	295	70	9LBM2120LEDK	1

- LENA – I OM (surface mounting) with LED tubes

Watt	Colour temp. (K)	Colour body	Size			Catalogue number	Packing (pcs)
			Length	Width	Height		
2X10W	6400	white	608	308	70	9LOM260LEDK CW	1
2X10W	4000	white	608	308	70	9LOM260LEDK	1
4X10W	6400	white	608	608	70	9LOM460LEDK CW	1
4X10W	4000	white	608	608	70	9LOM460LEDK	1
2X18W	6400	white	1218	308	70	9LOM2120LEDK CW	1
2X18W	4000	white	1218	308	70	9LOM2120LEDK	1

Energy efficiency

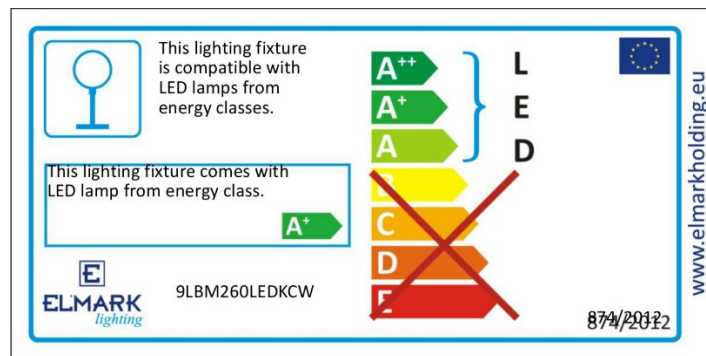

Barcodes

Barcode	Catalogue number
3800131189479	9LBM260LEDK CW
3800131189486	9LBM260LEDK
3800131189493	9LBM460LEDK CW
3800131189509	9LBM460LEDK
3800131189516	9LBM2120LEDK CW
3800131189523	9LBM2120LEDK
3800131189530	9LOM260LEDK CW
3800131189547	9LOM260LEDK
3800131189554	9LOM460LEDK CW
3800131189561	9LOM460LEDK
3800131189578	9LOM2120LEDK CW
3800131189585	9LOM2120LEDK

Standards

EN 60598-1

EN 60598-2-1

